


# Old Bonhomme Road Restoration Project

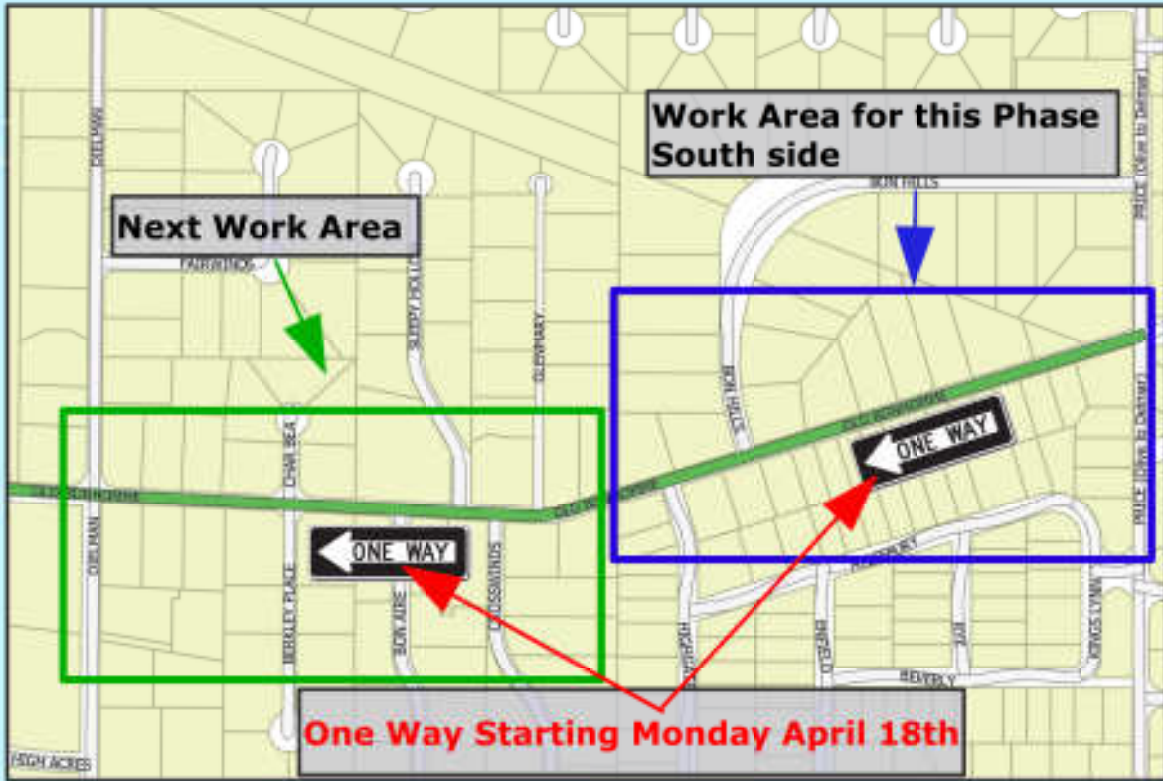

Sidewalk and curb replacement will begin April 13, 2016 weather permitting. The work zone for this phase will be from Price Rd. to Dielman Rd. Spencer contracting will begin at Price Rd and work WEST toward Dielman on the SOUTH side of the road.

**OLD BONHOMME ROAD WILL BE CLOSED TO EAST BOUND TRAFFIC BETWEEN DIELMAN AND PRICE BEGINNING MONDAY APRIL 18TH. PLEASE PLAN ACCORDINGLY AND BE PATIENT.**

Ameren UE will begin Utility work the week of May 2. Once utilities are relocated construction can begin on the north side of the road.

**Olivette**  
*...in the center of it all*

## Project Liaison

Cochran Engineering  
Dave Shoemake  
[Dshoemake@CochranEng.Com](mailto:Dshoemake@CochranEng.Com)  
O 314-842-4033x4114  
C 636-234-7725 F 314-842-5957

# Old Bonhomme Road Restoration Project

## What to Expect

### Project Scope Includes:

- Sidewalk replacement per ADA Guidelines
- New Curb and Gutters
- Pavement mill and asphalt overlay
- Ameren UE, AT&T and Charter Utility improvements and relocations

**Drive Slow – Construction Zone**  
**WORKZONE SPEED LIMIT – 20 MPH**  
**NO ON-STREET PARKING IN WORKZONE**

### Construction Zone Safety

- Drive slowly and cautiously
- Remain calm. Construction crews will accommodate you as efficiently as possible. In active working areas, wait for a signal before proceeding
- Keep children away from equipment and materials. It is difficult for workers to see children, and there are many potential hazards.
- Children and parents are welcome to watch from a safe distance.
- Cyclists should watch for construction vehicles in the work zone and ride or walk their bike on the grass when a vehicle is in the vicinity

### Project Process:

- Site Preparation – Tree Removals
- Utility relocations
- Sidewalk replacement
- Property restoration
- Driveway apron replacement
- Curb and gutter replacement
- Pavement milling
- Asphalt overlay

### Trash, Recycling and Yard Waste

Present your collection materials at the curb just like normal. Construction Crews will allow Republic Services trucks into the construction zone.

### Project Funding

This project is funded by the City Capital Projects Fund and a grant from the Federal Highways Administration administered by MODOT.

### Curbs, Gutters & Driveways

Existing rolled curbs and gutters will be replaced with mountable concrete curbs. The Contractor will need to pour the curb across driveway entrances to create a continuous gutter line. As part of the project driveway aprons will be replaced. Spencer Contracting will notify each property owner to schedule work. If no one is home a door hanger will be left at your property with contact information. In some cases they will replace the apron and sidewalk in 2 sections to allow continuous property access. Concrete has a minimum curing time of five days, so you will be unable to use your driveway at least this amount of time. The City's Contractor is required to give residents 72 hours notice prior to limiting access to a driveway.

### Mail Delivery

The USPS is working with the City and Contractor to ensure that mail service is not interrupted.

### Project Liaison

Cochran Engineering  
Dave Shoemake  
[Dshoemake@CochranEng.Com](mailto:Dshoemake@CochranEng.Com)  
O 314-842-4033x4114  
C 636-234-7725 F 314-842-5957